

### LEVEL 1 MEDICAL BARRIER FABRICS

Milliken Perimeter™

#### Typical Environments for Usage: Basic Care, Standard Hospital Medical Unit

- Meets ANSI/AAMI PB70 Standard
- Used for MINIMAL risk situations
- Provides a slight barrier to small amounts of fluid penetration
- Single test of water impacting the surface of the gown material is conducted to assess barrier protection performance




### LEVEL 2 MEDICAL BARRIER FABRICS

Milliken Perimeter™

#### Typical Environments for Usage: Blood draw from a vein, Suturing, ICU, Pathology lab

- Meets ANSI/AAMI PB70 Standard
- Used for LOW risk situations
- Provides a barrier to larger amounts of fluid penetration through splatter and some fluid exposure through soaking
- Two tests are conducted to assess barrier protection performance:
  - Water impacting the surface of the gown material
  - Resistance to water pressure

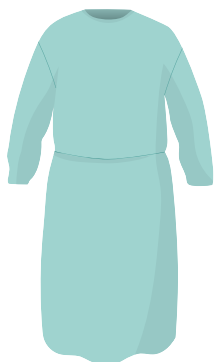

### LEVEL 3 MEDICAL BARRIER FABRICS

Milliken Perimeter™

#### Typical Environments for Usage: Arterial blood draw, IV insertion, Emergency room, Trauma

- Meets ANSI/AAMI PB70 Standard
- Used for MODERATE risk situations
- Provides a barrier to larger amounts of fluid penetration through splatter and more fluid exposure through soaking than Level 2 materials
- Two tests are conducted to assess barrier protection performance:
  - Water impacting the surface of the gown material
  - Resistance to water pressure

See key performance characteristics on next page.

MMF-042720

**Milliken Perimeter™** | Level 1 Medical Barrier Fabrics

CHARACTERISTICS	TEST METHOD	PERFORMANCE
Barrier Classification	AAMI PB70	Level 1
Water Resistance: Impact Penetration	AATCC 42	<4.5 g

**Milliken Perimeter™** | Level 2 Medical Barrier Fabrics

CHARACTERISTICS	TEST METHOD	PERFORMANCE
Barrier Classification	AAMI PB70	Level 2
Water Resistance: Impact Penetration	AATCC 42	<1 g
Water Resistance: Hydrostatic Pressure	AATCC 127	>20 cm

**Milliken Perimeter™** | Level 3 Medical Barrier Fabrics

CHARACTERISTICS	TEST METHOD	PERFORMANCE
Barrier Classification	AAMI PB70	Level 3
Water Resistance: Impact Penetration	AATCC 42	<1 g
Water Resistance: Hydrostatic Pressure	AATCC 127	>50 cm

As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at [www.milliken.com/terms](http://www.milliken.com/terms) (all additional/different terms are rejected) unless explicitly agreed otherwise in a signed writing.

Milliken and Perimeter are trademarks of Milliken & Company. © Milliken & Company. All rights reserved.

MMF-042720