


# Milliken® Tegris® Profile Liners


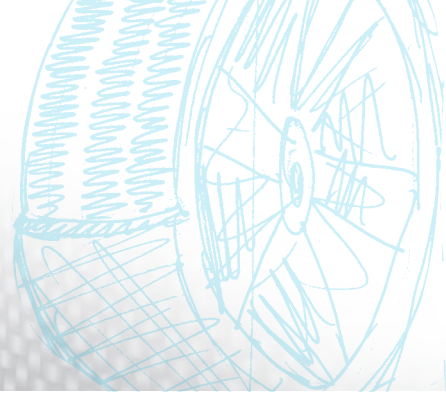


## Give your rubber the Tegris® experience

Tegris® liners endure your most demanding requirements and stand the test of time

### Benefits:

- Designed for cassette applications
- Rubber spacers included to prevent crushing of profiled rubber parts
- Super stiff in both directions: handles heavy rubber parts and prevents wrinkles
- Clean release for standard and tacky rubber compounds
- Extended service life: up to 2 x longer than other liners

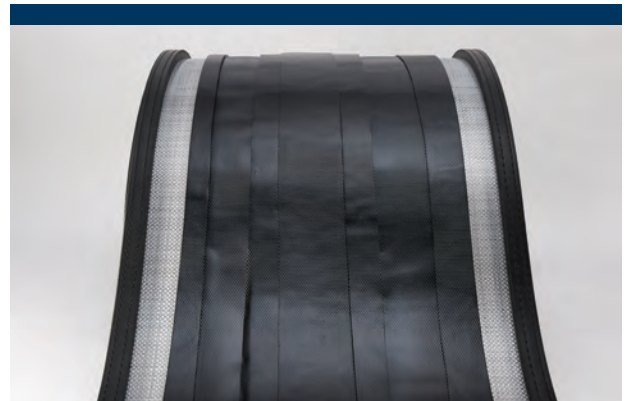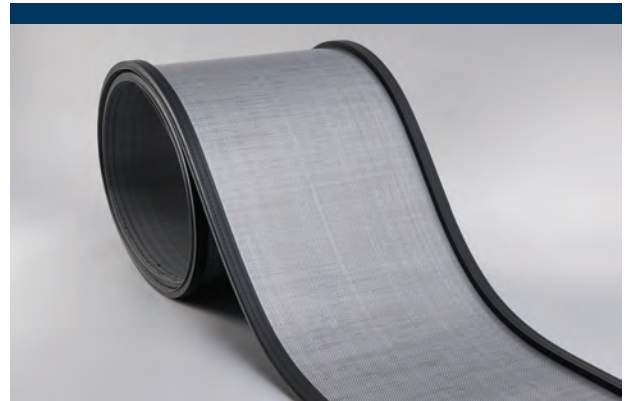

## Test Matrix

		Performance Attributes				Other Attributes			
		Release N	Stiffness W g force	Stiffness F g force	Ball Burst kg/force	Weight g/sqm	Thickness mm	Warp Yarn	Fill Yarn
<b>Flex</b>	PP-190	Best	158	1005	132	185	0.51	Multifil	Monofil
	PET-205	Best	680	729	129	205	0.43	Textured	Textured & Monofil
<b>Stiff</b>	PP-265	Best	208	3795	218	255	0.69	Multifil	Monofil
	PET-280	Better	349	4159	196	280	0.51	Textured	Monofil
	PET-475	Good	175	10766	298	475	0.64	Multifil	Monofil
<b>Super Release</b>	PET-370SR	Better	543	4045	199	355	0.57	Multifil	Monofil
	PET-475SR	Better	327	9953	271	475	0.64	Multifil	Monofil
<b>Profile Liner</b>	Tegris®-500	Better	30373	28487	449	510	0.63	Tape	Tape
<b>Curing Liner</b>	COT-200	Good	94	23	73	203	0.33	Spun	Spun
<b>Test Method</b>			ASTM D6828 modified	ASTM D6828 modified	ASTM D3787	ASTM D3776	ASTM D1777		

**Europe**  
Milliken Textiles BVBA  
Ham 24  
9000 Ghent  
Belgium  
Tel: (+32) 9 265 1071  
email: trgeurope@milliken.com

**Asia**  
Milliken Chemical & Textile  
(India) Company Pvt Ltd  
Bommasandra - Jigani Link Road  
Bangalore - 560105, India  
Tel: (+91) 924 360 4689  
email: trgasia@milliken.com

**USA**  
Milliken & Company  
920 Milliken Road  
Spartanburg, SC, USA 29303  
Tel: (+01) 864 503 2574  
email: trgamericas@milliken.com

*Milliken*  
reinforcements.milliken.com